

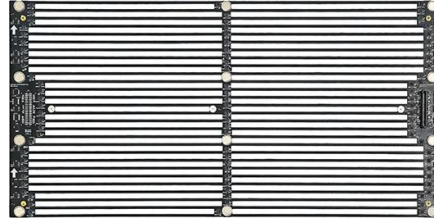


# P8.9286(GOB)-1000\*1000 Outdoor Carbon Fiber Cabinet

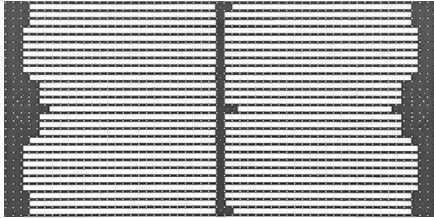

**Module**

**Cabinet**

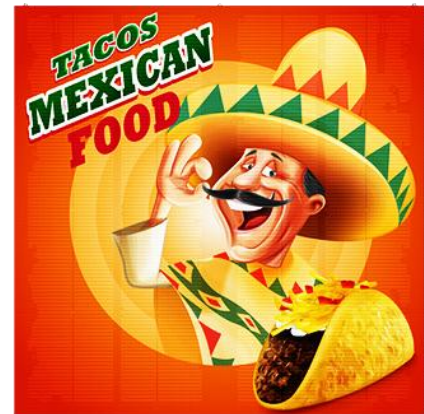

## Features:

1. Lightweight&Thin: Carbon fiber integrated frame, only 12.5kg/m<sup>2</sup>, easy to install and maintain.
2. High Transparency: 65% transparency turns glass facades into vivid video walls without obstructing the outdoor view.
3. Magnetic Design: Front/rear maintenance with magnetic modules; precise magnetic alignment installation, ideal for rental applications.
4. Smart Heat Dissipation: Intelligent fans that adjust speed based on internal temperature, enhancing cooling efficiency, minimizing energy waste.
5. Applications: Supports stacking, hanging, and other installations. Designed to provide ultra-light&thin, visualized, digital LED display solutions for stage shows, business meetings, and exhibitions.

### Technical Parameters:


	Item	Specification Parameter
Module Parameter	Pixel Pitch、Resolution rate、size	8.9286mm、56*28、500*250*15mm
	Pixel color、 Pixel LED	1R1G1B、SMD1921
	Working voltage、 Module Power	DC5V、 57W
	Driving IC、 Driving way	ICND2153SAN、 1/4S
	HUB	C-Carbon P8.9-HUB
	Cabinet Parameter	Material、 Cabinet Weight(kg/Cabinet)
Resolution rate、 size、 Module quantity		112*112Dots、 1000*1000*83.75mm、 2*4
Density		12544 Dots/m <sup>2</sup>
White balance 、 Color temperature		≤4000CD/m <sup>2</sup> 、 6000-8000K
view angel、 Transparency (%)		110H/V 、 65%
Maximal power/m <sup>2</sup> 、 Average power/m <sup>2</sup>		≤490W/m <sup>2</sup> 、 ≤150W/m <sup>2</sup>
Frame frequency、 Refresh frequency、 Gray		60Hz、 3840Hz、 13bit
Control system、 System supports		CHIPSHOW、 Windows XP,WIN 7
Working temperature、 Protection grade		-40~55℃、 Front/Back: IP65
*Reference information, different configurations, different parameters		

### Package Parameters:



Gross Weight (kg)	About 70KG (Estimated data,5pcs /Case)
Outer Package Size	1030*1030*525 (Estimated data,5pcs /Case)
Packing Material	Thickened Carton Packaging * Packaging for reference only, Please refer to the actual order.



**Assembly Sketch Map/Power Cable And Signal Cable Connection Sketch Map:**

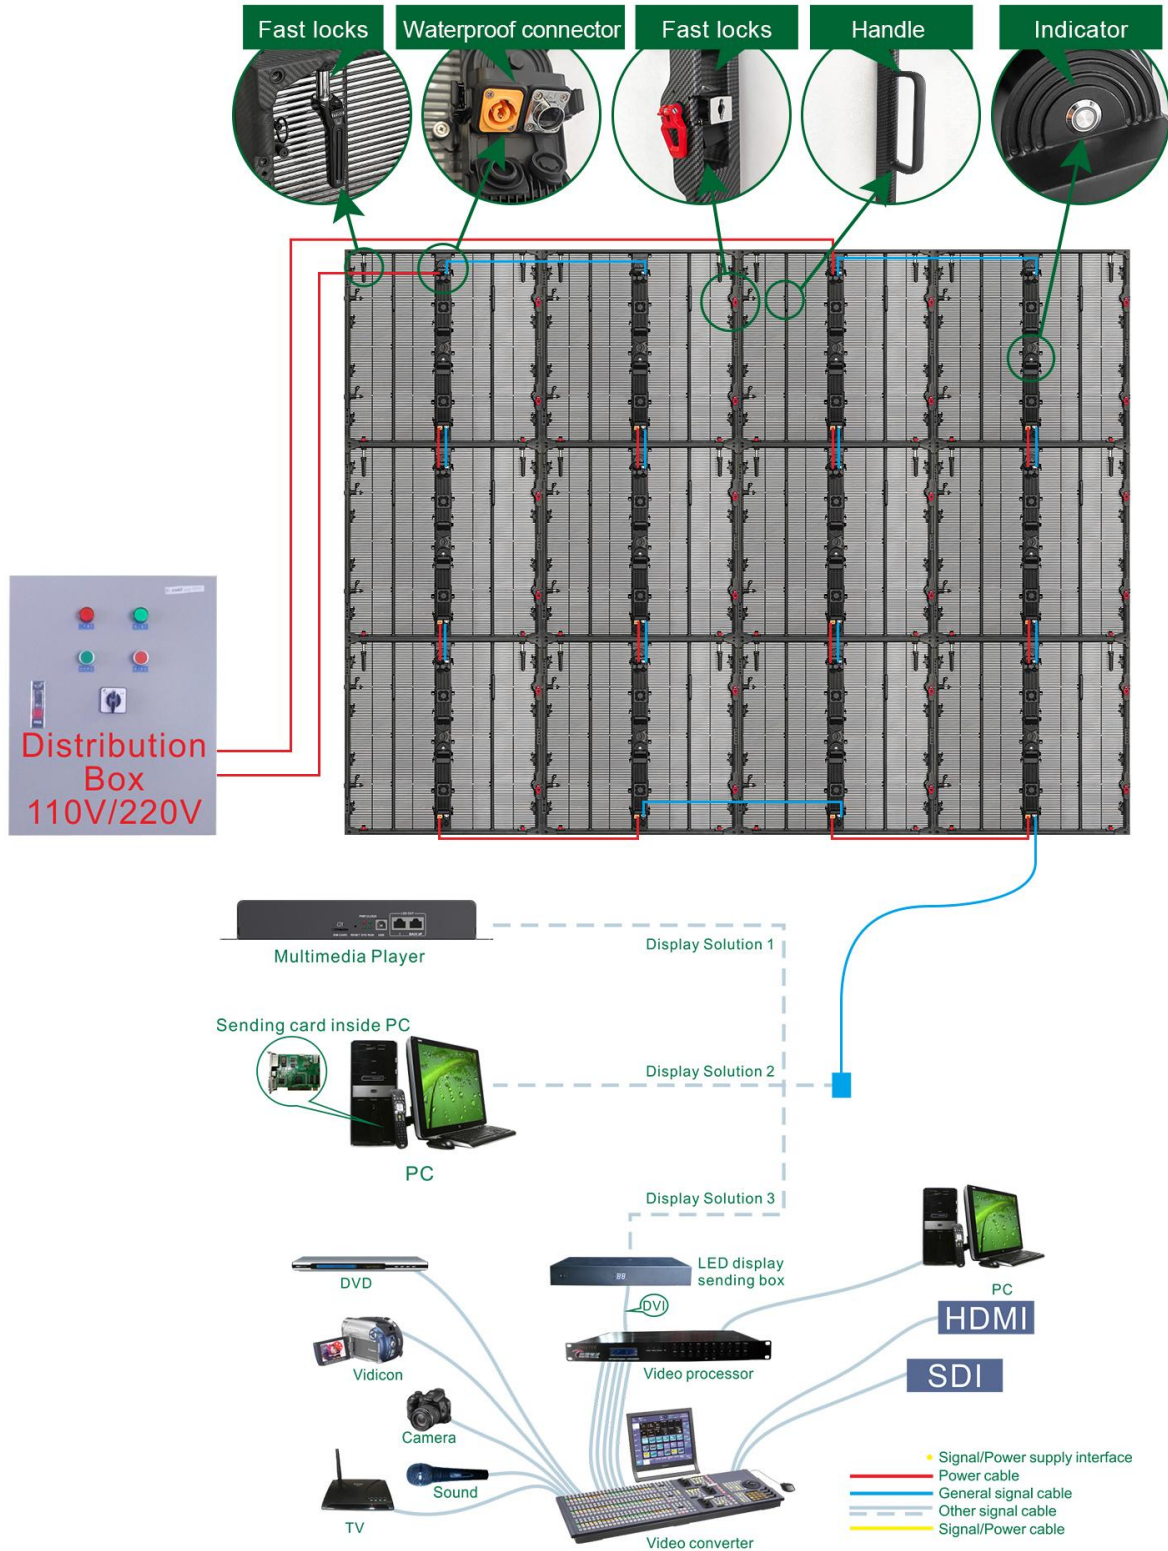


## P8. 9286 (GOB) - 1000\*1000 户外碳纤维箱体

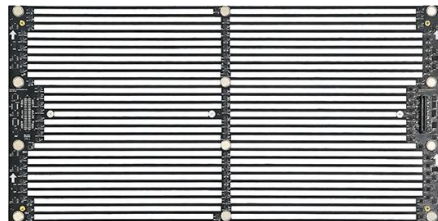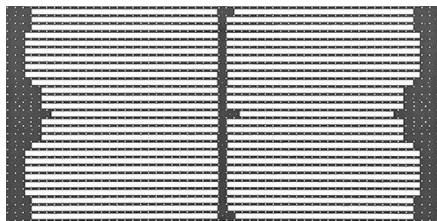

模组



箱体

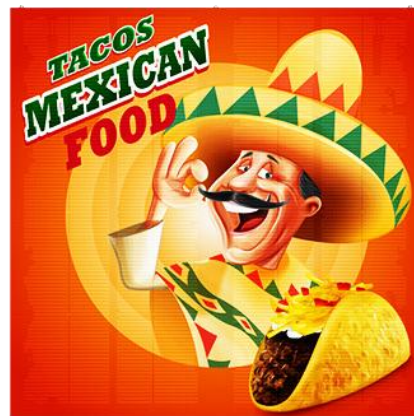

### 产品特点:

1. 极致轻量化: 碳纤维一体成型框架, 轻至  $12.5\text{kg}/\text{m}^2$ , 安装维护便捷;
2. 高通透显示: 65%通透度, 打破传统屏幕遮挡, 实现动态影像与建筑通透美学的共存;
3. 磁吸创新设计: 模组支持前后维护, 箱体精准磁吸定位, 租赁场景高效拆装;
4. 高效散热系统: 当箱体温度达到设定阈值时自动启动散热风扇, 兼顾散热效率与能源节约;
5. 全场景适配: 支持座装/吊装等安装方式, 专注为舞台演艺、商务会议、展览发布等领域提供可视化整体解决方案。

**产品参数:**

	名称	规格参数
模组参数	模组点间距、分辨率、模组尺寸	8.9286mm、56*28、500*250*15mm
	像素结构、LED封装方式	1R1G1B、SMD1921
	工作电压、模组功率	DC5V、57W
	驱动IC、扫描方式	ICND2153SAN、1/4S
	HUB	C-Carbon P8.9-HUB
	箱体参数	箱体材质、箱体净重(kg/箱体)
箱体分辨率、尺寸、模组排列		112*112Dots、1000*1000*83.75mm、2*4
像素点密度		12544 Dots/m <sup>2</sup>
白平衡亮度、白平衡色温		≤4000CD/m <sup>2</sup> 、6000-8000K
视角、通透率		110H/V、65%
最大功率、平均功耗		≤490W/m <sup>2</sup> 、≤150W/m <sup>2</sup>
换帧频率、刷新频率、灰度/颜色		60Hz、3840Hz、13bit
控制系统、系统支持		CHIPSHOW、Windows XP,WIN 7
工作温度、防护等级		-40~55℃、前/后: IP65
*根据配置不同, 参数略有变化。 备注: 仅供参考, 欢迎来电咨询, 最终解释权归属深圳市齐普光电子股份有限公司。		

**包装参数:**

含包装毛重 (kg)	约 70KG (估算重量 5pcs /箱)
外包装尺寸	1030*1030*525 (估算尺寸, 5pcs /箱)
外包装 材质类型	加厚型纸箱包装



连线操作示意图：

